


RECOMMENDED SOAKWELL CAPACITY

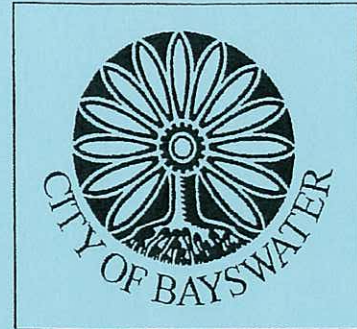

Below is a formula for the required volume of soakwells for total roofed and paved areas.

$$\text{AREA(m}^2\text{)} \times 0.0125 = \text{VOLUME(m}^3\text{)}$$

DIAMETER (mm)	DEPTH (mm)	CAPACITY (m3)
600	600	0.17
900	600	0.38
900	900	0.57
900	1200	0.76
1070	600	0.54
1070	1200	1.09
1200	600	0.68
1200	900	1.02
1200	1200	1.36
1200	1500	1.70
1500	600	1.06
1500	1200	2.10
1500	1500	2.65
1800	600	1.53
1800	900	2.29
1800	1200	3.05
1800	1500	3.82
1800	1800	4.58

Simply calculate the area to be roofed or paved and use the above formula to find out the required amount of soakwell volume.

Eg. 60m² of paved area.

$$60 \times 0.0125 = 0.75$$

Required soakwell size = 900 x 1200

Note: Always round up to the nearest volume.